


Refrigerated Container (Temperature Controlled Container)

20'

ISO Size Type Code: 22 R1
(22 R9)

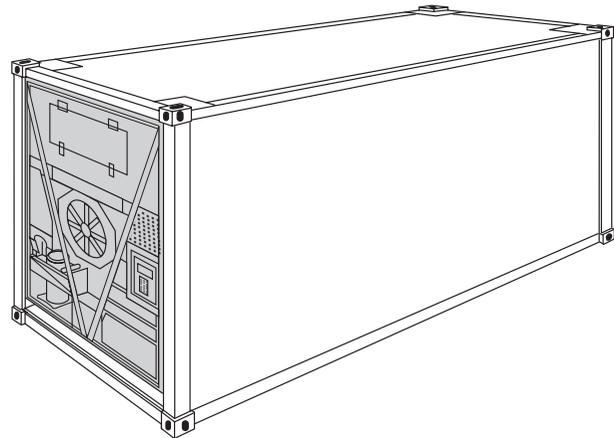

- State of the art insulation factors.
- Container available for set points as low as -35° C.
- De-humidification option available.
- Cold treatment available (USDA).
- 20' Boxes with up to 29.9 qm capacity.
- Controlled fresh-air supply with up to 280 qm/h.
- ATO-DLO certification for flowerbulk.
- Integrated datalogger storing temperatures and events hourly.
- Low power consumption.
- Only environmental friendly refrigerants used.
- Dedicated equipment for non-foodstuff cargoes.
- Other series solely for foodstuff cargoes.
- Please note maximum stowage height in below table and as indicated by red line inside the container in order to ensure proper air circulation.
- Voltages: 380 V/50 Hz to 460 V/60 Hz
- Technical specification and illustration of electric plugs see page 44.
- The Container is designed to maintain the setpoint temperature.
- All cargo shall be pre-cooled to match the required in transit temperature.
- Especially for cargo which needs controlled temperatures above or below freezing point.
- Suitable for clip-on generators
- Freshair recording available

Cigisped: ph: +39 010 8607214 +39 010 815873 - cigisped@cigisped.it - www.cigisped.it

Refrigerated Container

20'

Containers are available for set points as low as **-35° C** and up to **+30° C**, please contact Cigisped for availability.

Construction	Inside Dimensions				Door Opening		Weights			Capacity
	Length mm ft	Width mm ft	Height mm ft	Max. stow. Height mm ft	Width mm ft	Height mm ft	Max. Gross kg lbs	Tare kg lbs	Max. Payload kg lbs	
8'6" high										
Steelframe, Sandwich walls	5 479 17'11 ⁵ / ₈ "	2 286 7'6"	2 257 7'4 ⁷ / ₈ "	2 157 7'7 ¹ / ₈ "	2 286 7'6"	2 220 7'3 ³ / ₈ "	30 480 67 200	3 160 6 970	27 320 60 230	28,3 999

Remarks:

- 3) Prepared for being equipped with additional cargo temperature sensors (USDA).
- 4) De-humidification option installed.
- 5) **Not to be used for foodstuffs. ISO size type code: 22 R9**

Cigisped: ph: +39 010 8607214 +39 010 815873 - cigisped@cigisped.it - www.cigisped.it

Refrigerated Container

20'

Containers are available for set points as low as **-35° C** and up to **+30° C**, please contact Cigisped for availability.

Construction	Inside Dimensions				Door Opening		Weights			Capacity m ³ cu.ft
	Length	Width	Height	Max. stow. Height	Width	Height	Max. Gross	Tare	Max. Payload	
	mm ft	mm ft	mm ft	mm ft	mm ft	mm ft	kg lbs	kg lbs	kg lbs	
8'6" high										
Steelframe, Sandwich walls	5 452 17'10 ⁵ / ₈ "	2 293 7'6 ¹ / ₄ "	2 252 7'4 ⁵ / ₈ "	2 152 7'3 ¹ / ₄ "	2 290 7'6 ¹ / ₈ "	2 265 7'5 ¹ / ₈ "	30 480 67 200	3 160 6 970	27 320 60 230	28,3 999